

Package

Dur-A-Lift DCP-36 Cable Placer

- Telescopic Articulated Cable Placer
- Non-Insulated
- Hot-Dipped, Galvanized Basket
- 400# of Side Pull
- 50# of Down Pull
- Fairleads for Cable Lashing
- Direct Communication Between Operator & Driver
- Operate in Stationary & Mobile Modes
- Max Working Height: 41'
- Max Side Reach: 26' 6"

Package Price Includes:

NEW - Dur-A-Lift DCP-36

- 41' Working Height
- 350 LB Basket Capacity
- Non-Insulated

2023 Ford F550 Chassis

- Diesel Engine
- Knapheide Service Body
- Safety Lighting

Additional Options Available Upon Request



Dur-A-Lift's rugged cable placer unit is capable of withstanding the harsh applications of mobile operation. The smooth, easy to operate control system is packed with behind the scenes safety elements.



DCP-36 Detailed Specifications:

DCP-36 Cable Placer

- Operate in stationary and mobile mode
- Steel extension boom
- 24" x 30" x 42" steel galvanized basket with Fairleads
- Yoke end mounted walk-in basket with door
- 370° hydraulic limit, non-continuous rotation
- Dual cross over relief reduces rotation overloads
- Hydraulic leveled basket
- 4 Function Joystick
- Pistol grip lower remote control-boom functions, lower stow, start/stop, two speed
- Single-hand upper control joystick
- Upper and lower basket to cab intercom communication system
- 110 volt outlet at basket
- Open center hydraulic system
- Working Height 41'
- Side Reach 26' 6"
- Stowed Travel Height 10' 1"
- DC Backup

Bed Options:

- Knapheide 6131D54 Service Body
 - Body Material 14 ga A40
 - Streetside & Curbside Compartments
 - Adjustable Shelves w/ Dividers
 - 30"x94" Tailshelf, Steel Walkup w/Aluminum Pole Handles, 10" Belting Step
 - (8) Compartment LED Light kit
 - (4) Work Light LED 4" (Cargo Area, Rear Components)
 - Wheel Chock Holder

Hydraulic Items:

- PTO/Pump Chelsa 6.7L Diesel
- Wire Braid Pressure Hose and Fitting Below Rotation
- Inverter, Xantrax X-Power 3000 W
- Levleride Torsion Bar Kit
- Timbren Load Booster
- Ladder Rack, Quick Lock Aluminum

Additional Items:

- Mud Flaps
- Fire Extinguisher 10 lb
- Backup Alarm
- Wheel Chock w/ Eyebolt
- Triangle Reflector Kit
- (2) 4' Clear/Amber Strobes (Rear Tailshelf)
- (1) Strobe Rotating Amber
- (2) Strobe Cl/Amber (Front Gill)

Chassis Specifications:

2022 F550 Chassis 4x4 SD Crew Cab 203' WB DRW XL 84" Cab to Axle Measurement, DRW, Oxford White Clear Coat, HD Vinyl 40/20/40 Split Bench Seat, AM/FM Stereo w/ MP3 Player; SYNC Communication Power Equipment Group, 10 speed TorqShift Transmission w/PTO Provisions Limited Slip with 4.88 Axle, 6.7 L 4V OHV Power Stroke V8 Turbo Diesel, 40 Gal Aft of Axle Fuel Tank, GVWR: 19,500 pound payload package, Tires:LT225/70R19.5 BSW all positions, Wheels: 19 inch Argent painted steel, Payload Plus Package Upgrade, Engine Block Heater, 332 Amp Alternators, Utility Lighting System- including LED side mirror spotlights, Trailer Brake Controller, Rear View Camera and Prep Kit, Front Splash Guards/Mud, XL Value Package, Medium Earth Gray w/HD

*Due to current market volatility the above is budgetary pricing. Final pricing will be adjusted to actual pricelist. Anticipated adjustment should be minimal. Chassis pricing is subject to change based upon availability of quoted model year/chassis manufacturer surcharge at time of order.



- 400# SIDE PULL; 50# DOWN PULL
- FAIRLEADS FOR CABLE LASHING
- DIRECT COMMUNICATION BETWEEN OPERATOR AND DRIVER
 - OPERATES IN MOBILE OR STATIONARY MODE







0

	DCP-36
WORKING HEIGHT	41′
SIDE REACH	26'6"
APPROX, STOWED TRAVEL HEIGHT	10'1"
HEIGHT TO BOTTOM OF PLATFORM	36′
BASKET CAPACITY	350#
APPROX, LIFT WEIGHT	2675#
MAIN BOOM TRAVEL	-25° t₀ 75°
ARTICULATING ARM TRAVEL	-6° to 83°
EXTENSION TRAVEL	110.5″
SIDE PULL	400#

DOWN PULL

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or enceeds all applicable ANSI Standards as of the date of manufacture.

50#


SPECIFICATIONS







REACH DIAGRAM

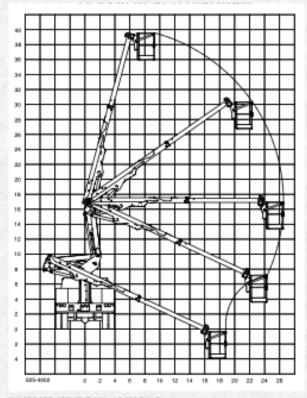



Tons of storage options specially designed for those in the telecom and utilities industries.

STANDARD

Operates in stationary and mobile mode; steel extension boom; 24" x 30" x 42" steel galvanized basket with fairleads; yoke endmounted walk-in basket with door; 370° hydraulic limit, non-continuous rotation; dual cross over relief reduces rotation overloads; hydraulic leveled basket; pistol-grip lower remote control-boom functions, lower stow, start/stop, two speed; single-hand upper control joystick; upper and lower basket to cab intercom communication system; 110 volt outlet at basket; open-center hydraulic system Dur-A-Lift's rugged cable placer unit is capable of withstanding the harsh applications of mobile operation. The smooth, easy to operate control system is packed with behind the scenes safety elements.



Sec. 1

READ MORE

CHASSIS REQUIREMENT, MIN.: 15,000 GVWR CHASSIS CAB TO AXLE REQUIREMENT, MIN.: 84*

Secure your New 2023 DCP-36

Please Complete the below information and send signed quote to: SALES@TCGUTILITY.COM

Business Information

Company Name:	
ype of Business:	
Corporate Address:	
CG Sales Rep:	

Contact Information

Name:	
Title:	
Phone.#: _	
Email:	

Please Check All that Apply:

Send Information on	Financing	Options
---------------------	-----------	---------

ADDITIONAL OPTIONS REQUESTED:

Signature:_

Date: ____

